

TOPPS SEAL™ SYSTEM 1000




Our 100% liquid applied rubber roofing meets demanding needs.

METAL ROOF UPGRADE

Metal roofs seldom wear out. They're lost from lack of maintenance.

Temperature changes loosen components. Weather erodes the thin protective finish. The result is leaks and surface rust.


Discover the amazing Topps Seal™ liquid applied 100% rubber system that corrects this and saves unnecessary replacement expense. This comprehensive system seals and locks in every fastener beneath a seamless rubber membrane that moves as needed. Adapts to any shape. Performs in all climates. The durable solution — available to you in 12 attractive colors.

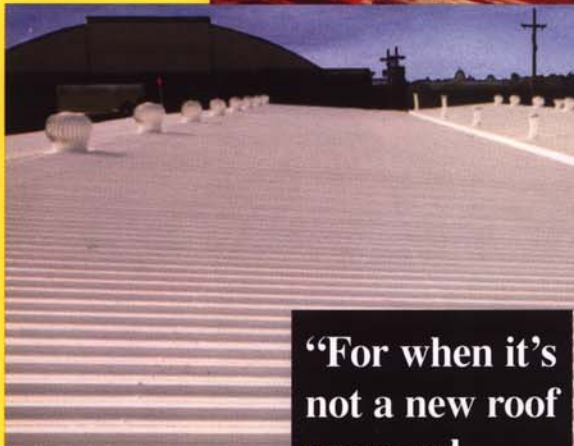

Typical Specifications Topps Seal™

	Standard	Excel
Elongation @ 77° F.	570% min.	~600%
@ 32° F.	~285%	~315%
Tensile Strength	1750 min.	2500 min.
Perm Rating	0.2	0.2
Adhesive Bond (Rating 1-5)	5 (best)	5 (best)
Heat Stability	180° F.	180° F.
Cold Stability	-40° F.	-40° F.
Resistance to:		
Corrosion	Excellent	Excellent
Industrial Pollutants	Excellent	Excellent
UV	Excellent	Excellent

“For when it’s not a new roof you need, but a better roof!”®

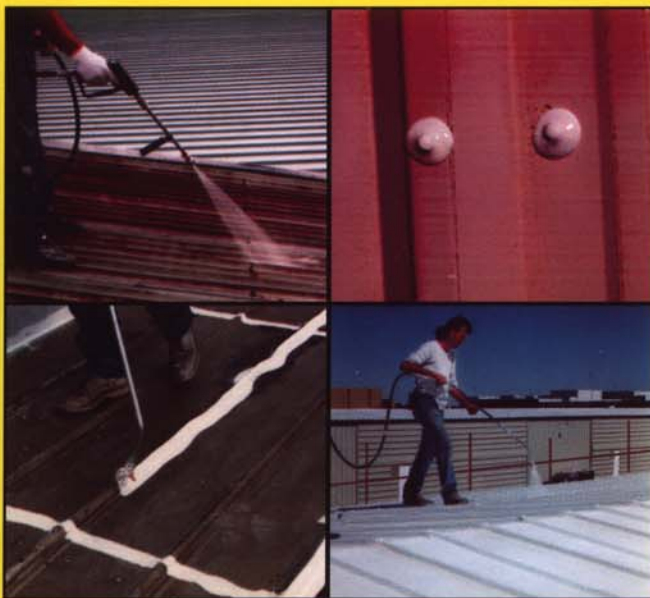

Preparation Power washing and RustArrestor™ prepare the surface for direct adhesion of the Topps system.

Fasteners After all fasteners are tightened, new ones added as necessary, each is sealed tight with RivetGuard™.

Seams SeamGuard™ sprayed into seams eliminates the source of most future roof leaks.

Surface Topps Seal™ seamless weatherproofing completes the process with a durable, weather resistant, attractive barrier.

Intended for Commercial & Industrial Use Only



Standard Colors

Colors shown, being ink on paper rather than rubber, may vary slightly from actual coating colors.



Topps Products, Inc. • 7200 W. 132nd St. Overland Park, KS 66213 USA
Tel: (913) 685-2500 • 1-800-867-7177 • Fax: (913) 851-9700 • e-mail: support@toppsproducts.com

Applied by Independent Contractors.